

PCM Vulcain™ 300V600

Performance	SI	US
Nominal displacement	3.00 m ³ /d/rpm	18.87 bpd/rpm
Pressure rating	60 bars / 6000 kPa	900 psi
Pressure per cavity	6.7 bars / 670 kPa	100 psi
Number of engaged cavities	9	
Minimum/maximum speed	50/400 rpm, depending on application	
ISO 15136-1 compliance	N/A	
Helix angle	71.4°	
Cavity flow area	2314 mm ²	3.59 in ²




Stator Specifications	Standard	
	SI	US
Top connection (API nominal size)	4½" (114.3 mm) EUE Pin	
Bottom connection (API nominal size)	4½" (114.3 mm) EUE Pin	
Body outside diameter	135.0 mm	5.31"
Maximum outside diameter	141.3 mm	5.56"
Maximum outside diameter if special clearance couplings are used	N/A	N/A
Length	8.80 m	28' 10.3"
Weight	290 kg	639 lb
Number of elements	3	
Top bushing or tag bar	Available	
Notes		

Rotor Specifications	SI	US
Top connection (nominal size)	1⅞" (28.6 mm) Mod. API Pin	
Total length	9.16 m	30' 0.6"
Helix length	8.80 m	28' 10.3"
Weight	132 kg	291 lb
Minor diameter	50.3 mm	1.980"
Major diameter	73.5 mm	2.894"
Head diameter	57.5 mm	2.264"
Maximum OD with full size coupling	73.5 mm	2.894"
Maximum OD with slimhole coupling	73.5 mm	2.894"
Orbit diameter with full size coupling	96.5 mm	3.799"
Orbit diameter with slimhole coupling	96.5 mm	3.799"
Coating type	Chromium	
Coating thickness	Information upon request	



Completion Considerations
<i>Stator maximum OD must be less than casing drift diameter (some extra clearance is recommended)</i>
<i>Rotor maximum OD must be less than tubing drift diameter</i>
<i>Rotor orbit diameter must be less than pup joint drift diameter</i>

Contact your PCM representative for an operator's manual
 Top and bottom stator connections can be customized as required (pin/pin, box/box, etc., or changes in size in some cases)
 This is not a contractual document. PCM reserves the right to make changes at any time.

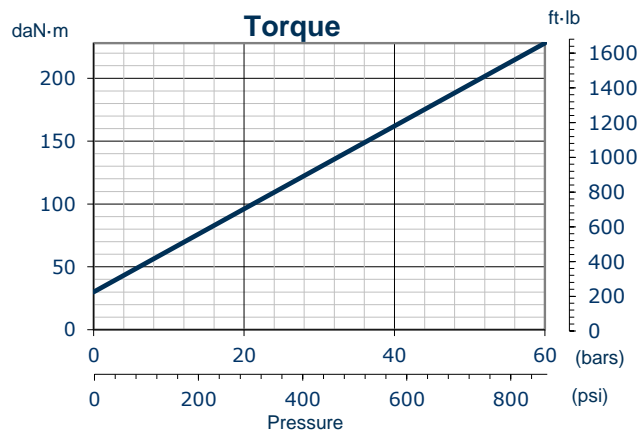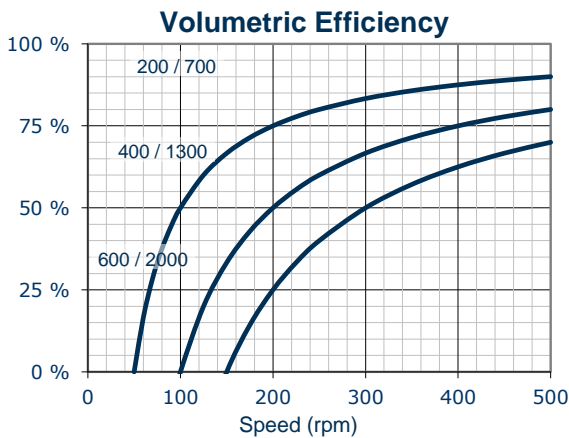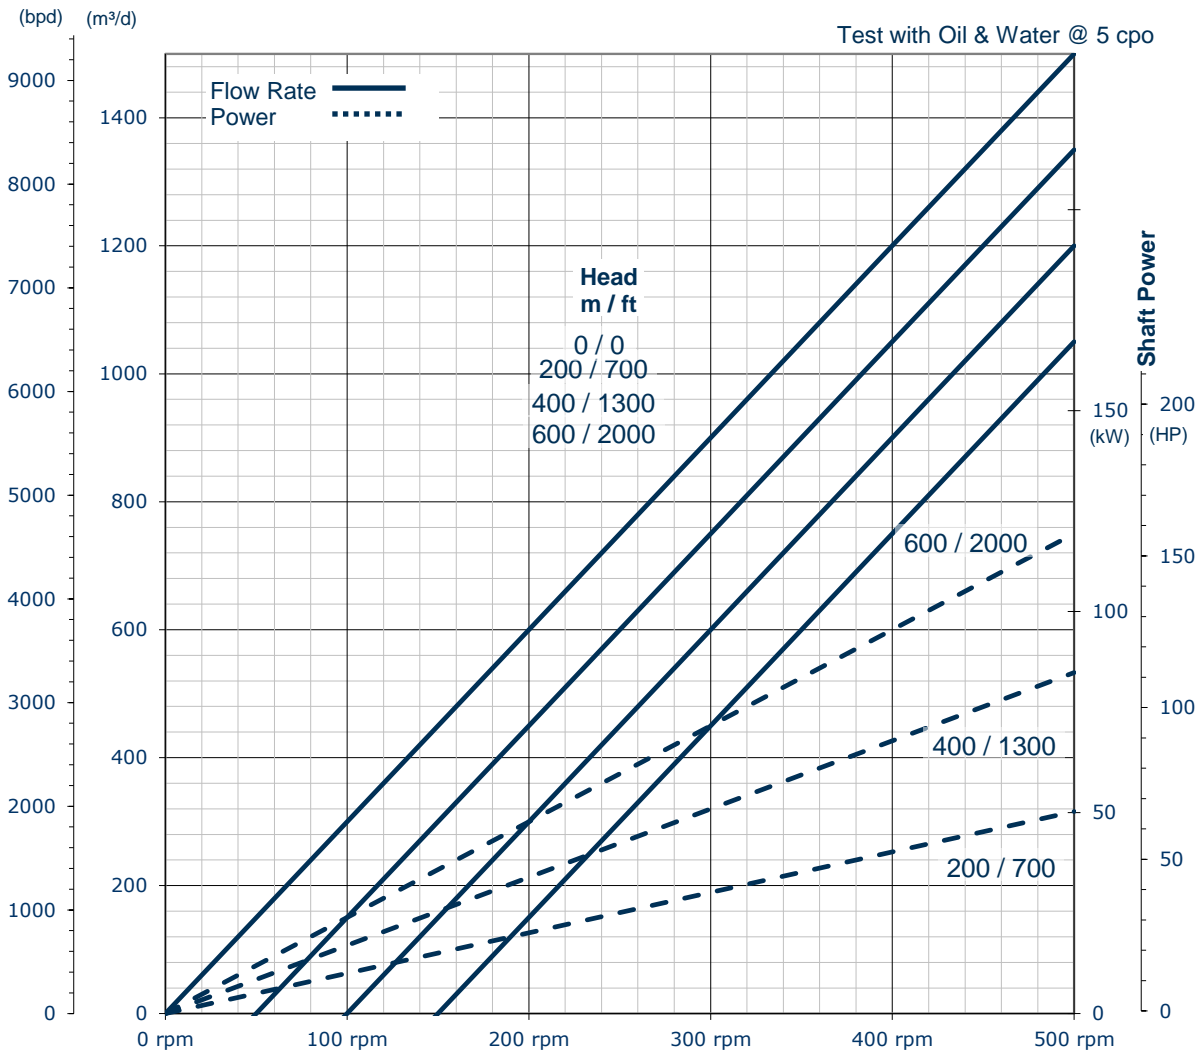

The flow rate chart is calculated using the validated displacement for this pump.

Revision Number 1-3-2 (2022/06/30)