

PCM Moineau™ 100E800

Performance	SI	US
Nominal displacement	1.00 m ³ /d/rpm	6.29 bpd/rpm
Pressure rating	80 bars / 8000 kPa	1200 psi
Pressure per cavity	6.7 bars / 670 kPa	100 psi
Number of engaged cavities	12	
Minimum/maximum speed	50/500 rpm, depending on application	
ISO 15136-1 compliance	V3/Q3 - Higher grade upon request	
Helix angle	61.5°	
Cavity flow area	1521 mm ²	2.36 in ²

Stator Specifications	Standard		Flush		Slim	
	SI	US	SI	US	SI	US
Top connection (API nominal size)	4" (101.6 mm) NUE Pin		3½" (88.9 mm) EUE Box		3½" (88.9 mm) EUE Box	
Bottom connection (API nominal size)	4" (101.6 mm) NUE Pin		3½" (88.9 mm) EUE Pin		3½" (88.9 mm) EUE Pin	
Body outside diameter	109.0 mm	4.29"	109.0 mm	4.29"	101.0 mm	3.98"
Maximum outside diameter	120.7 mm	4.75"	114.3 mm	4.50"	114.3 mm	4.50"
Maximum outside diameter if special clearance couplings are used	N/A	N/A	109.0 mm	4.29"	106.2 mm	4.18"
Length	5.76 m	18' 10.9"	7.59 m	24' 10.9"	7.59 m	24' 10.9"
Weight	170 kg	375 lb	191 kg	422 lb	113 kg	250 lb
Number of elements	2		2		2	
Top bushing or tag bar	Available		Available		Available	
Notes			Includes 6.0 ft pup joint		Includes 6.0 ft pup joint	

Rotor Specifications	SI	US
Top connection (nominal size)	1½" (28.6 mm) API Pin	
Total length	6.29 m	20' 7.6"
Helix length	6.07 m	19' 11.0"
Weight	56 kg	123 lb
Minor diameter	39.0 mm	1.535"
Major diameter	58.5 mm	2.303"
Head diameter	57.5 mm	2.264"
Maximum OD with full size coupling	60.3 mm	2.375"
* Maximum OD with slimhole coupling	57.5-59.1 mm	2.264-2.325"
Orbit diameter with full size coupling	79.8 mm	3.143"
* Orbit diameter with slimhole coupling	77.0-78.6 mm	3.031-3.093"
Coating type	Chromium	
Coating thickness	Information upon request	
This pump is available with (optional):	Paddle rotor	



Completion Considerations
<i>Stator maximum OD must be less than casing drift diameter (some extra clearance is recommended)</i>
<i>Rotor maximum OD must be less than tubing drift diameter</i>
<i>Rotor orbit diameter must be less than pup joint drift diameter</i>




* Depending on rotor fit

Contact your PCM representative for an operator's manual

Top and bottom stator connections can be customized as required (pin/pin, box/box, etc., or changes in size in some cases)

With a paddle rotor, the rotor length is extended by 600 mm (2 ft). Contact PCM for further details.

This is not a contractual document. PCM reserves the right to make changes at any time.

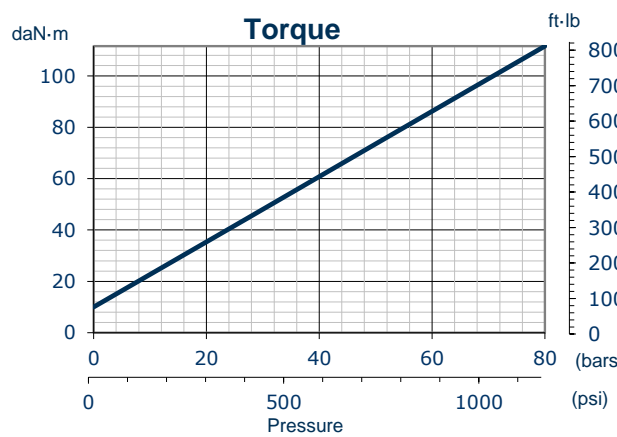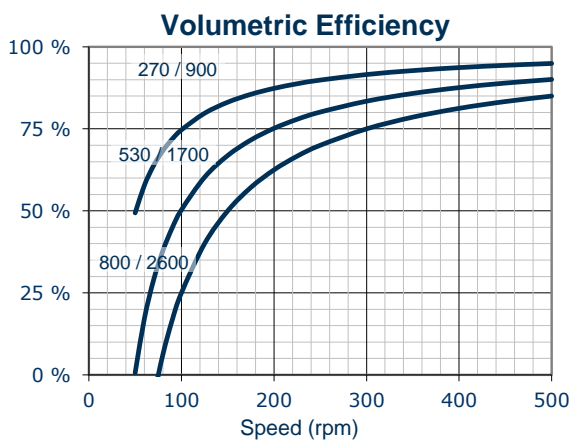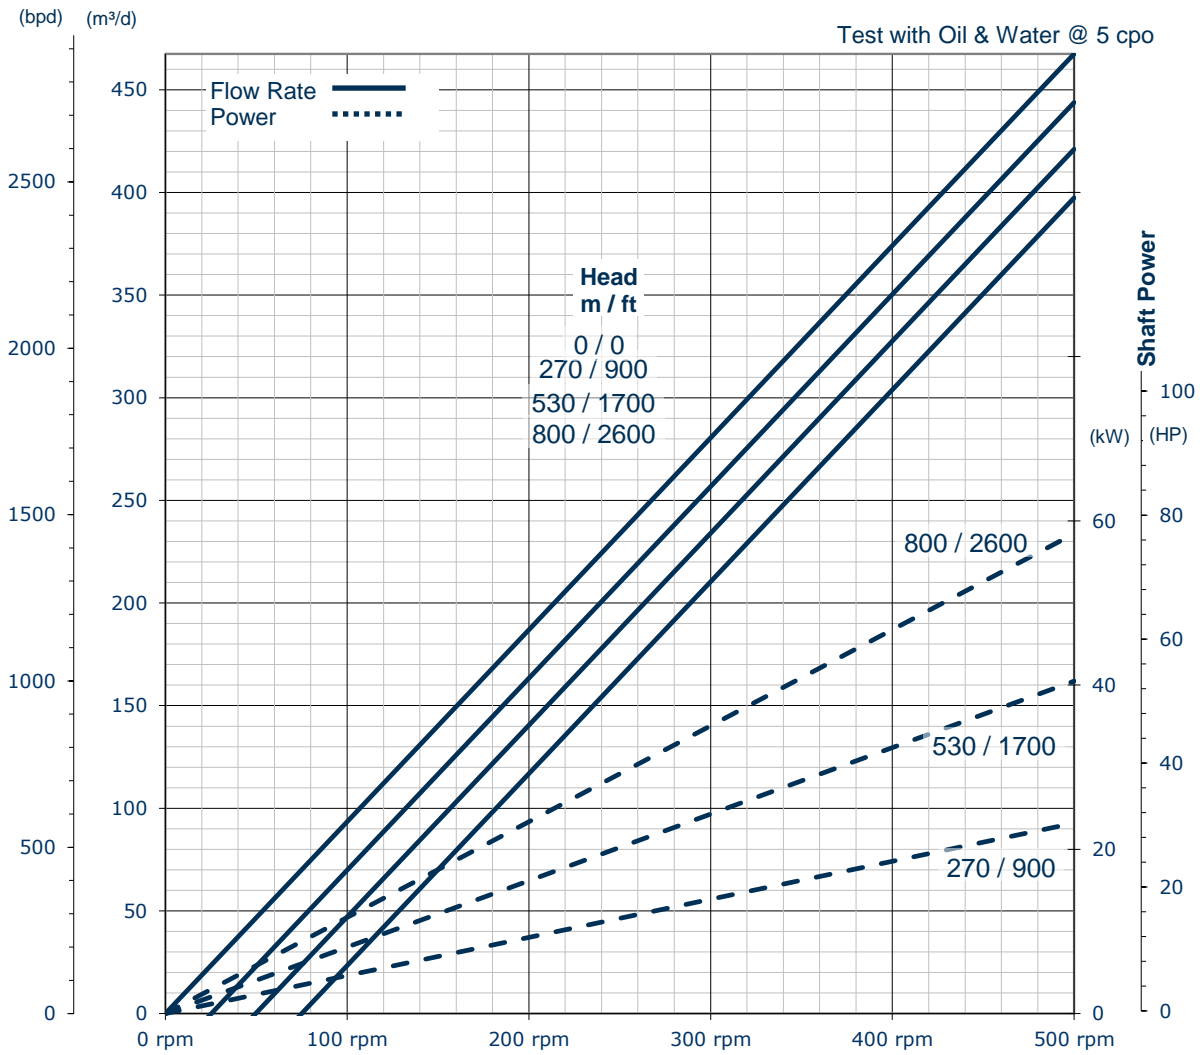

The flow rate chart is calculated using the validated displacement for this pump.

Revision Number 1-1-1 (2022/01/19)