

### PCM Moineau™ 48E300

Performance	SI	US
Nominal displacement	0.48 m <sup>3</sup> /d/rpm	3.02 bpd/rpm
Pressure rating	30 bars / 3000 kPa	400 psi
Pressure per cavity	5.0 bars / 500 kPa	70 psi
Number of engaged cavities	6	
Minimum/maximum speed	50/500 rpm, depending on application	
ISO 15136-1 compliance	V3/Q3 - Higher grade upon request	
Helix angle	66.9°	
Cavity flow area	812 mm <sup>2</sup>	1.26 in <sup>2</sup>

Stator Specifications	Standard		Flush	
	SI	US	SI	US
Top connection (API nominal size)	2 <sup>7</sup> / <sub>8</sub> " (73.0 mm) EUE Pin		2 <sup>3</sup> / <sub>8</sub> " (60.3 mm) EUE Box	
Bottom connection (API nominal size)	2 <sup>7</sup> / <sub>8</sub> " (73.0 mm) EUE Pin		2 <sup>3</sup> / <sub>8</sub> " (60.3 mm) EUE Pin	
Body outside diameter	86.0 mm	3.39"		
Maximum outside diameter	93.2 mm	3.67"	77.8 mm	3.06"
Maximum outside diameter if special clearance couplings are used	87.9 mm	3.46"	73.9 mm	2.91"
Length	2.61 m	8' 6.8"	4.44 m	14' 6.8"
Weight	60 kg	132 lb	76 kg	167 lb
Number of elements	1		1	
Top bushing or tag bar	Available		Available	
Notes			Includes 6.0 ft pup joint	

Rotor Specifications	SI	US
Top connection (nominal size)	7 <sup>8</sup> / <sub>16</sub> " (22.2 mm) API Pin	
Total length	3.20 m	10' 6.0"
Helix length	3.00 m	9' 9.9"
Weight	17 kg	37 lb
Minor diameter	29.0 mm	1.142"
Major diameter	43.0 mm	1.693"
Head diameter	40.0 mm	1.575"
Maximum OD with full size coupling	46.0 mm	1.812"
* Maximum OD with slimhole coupling	42.0-43.8 mm	1.654-1.723"
Orbit diameter with full size coupling	60.0 mm	2.363"
* Orbit diameter with slimhole coupling	56.0-57.8 mm	2.205-2.274"
Coating type	Chromium	
Coating thickness	Information upon request	
This pump is available with (optional):	Paddle rotor	



Completion Considerations
<i>Stator maximum OD must be less than casing drift diameter (some extra clearance is recommended)</i>
<i>Rotor maximum OD must be less than tubing drift diameter</i>
<i>Rotor orbit diameter must be less than pup joint drift diameter</i>




\* Depending on rotor fit

Contact your PCM representative for an operator's manual

Top and bottom stator connections can be customized as required (pin/pin, box/box, etc., or changes in size in some cases)

With a paddle rotor, the rotor length is extended by 600 mm (2 ft). Contact PCM for further details.

This is not a contractual document. PCM reserves the right to make changes at any time.

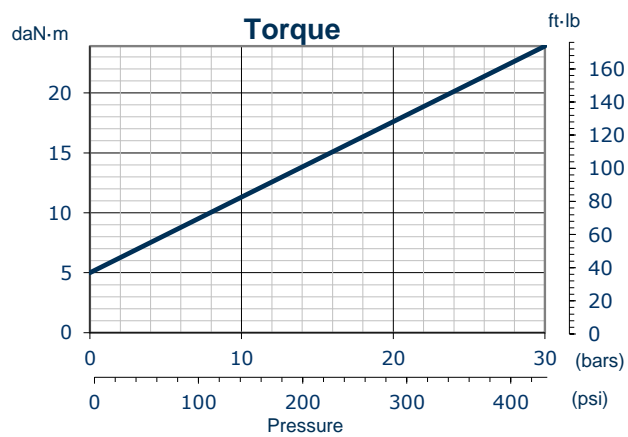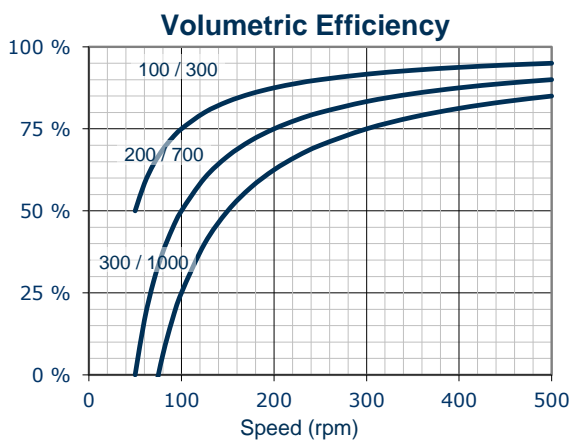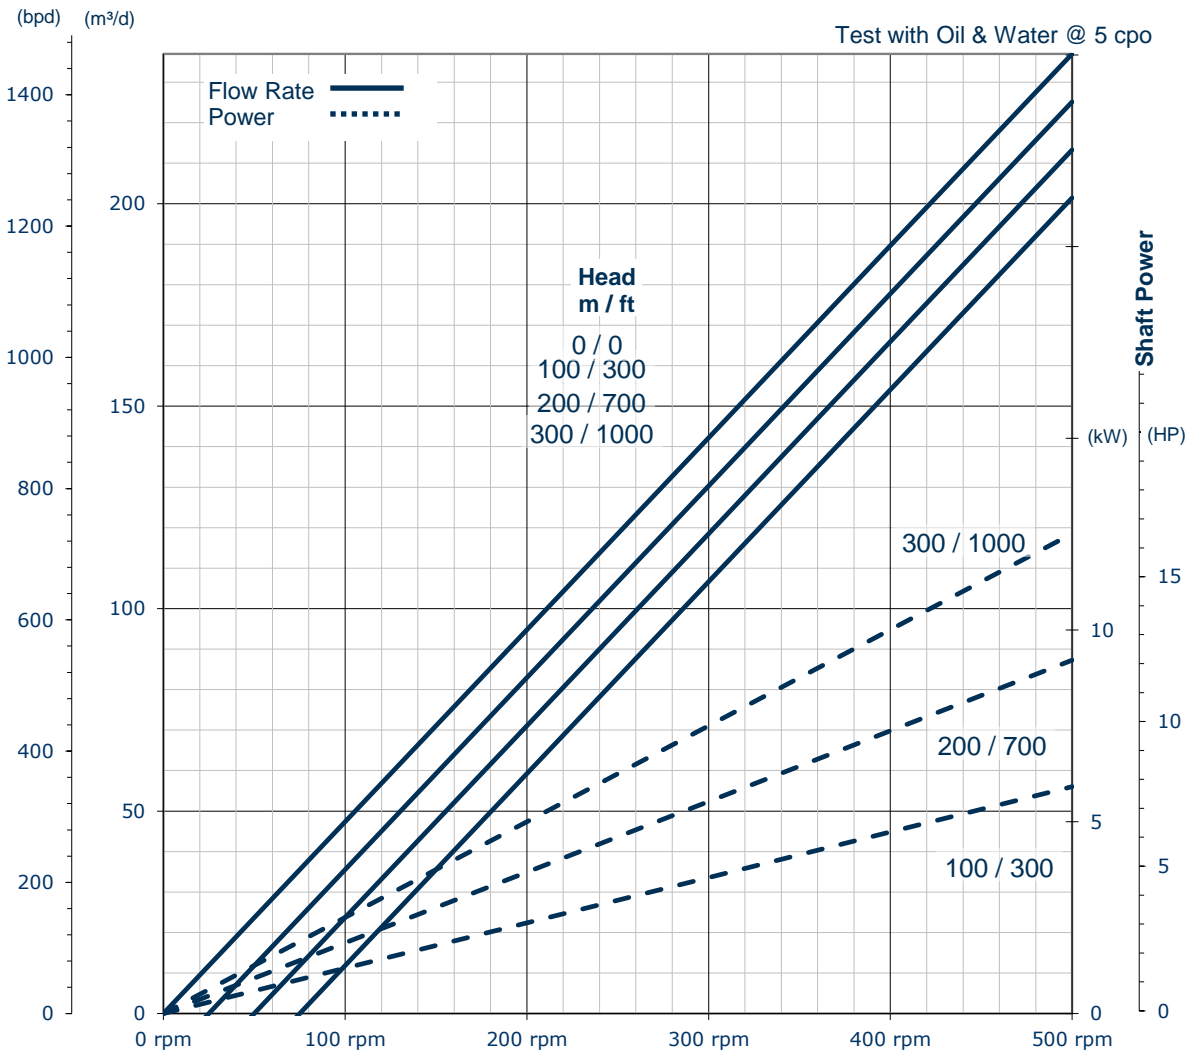

The flow rate chart is calculated using the validated displacement for this pump.

Revision Number 1-1-1 (2022/01/19)